

## SERIA SLIM



130  
lm/W

IP65

IK10

UGR<22

SDCM<5

10W, 20W, 30W, 50W, 80W, 100W, 150W, 200W  
130lm/W

Kąt rozproszenia: 60, 90, 120 stopni

5 lat gwarancji


Szeroki zakres strumienia świetlnego od  
1,300 do 26,000 lumenów



## Parametry


Model	DG-SL01-10W	DG-SL01-50W	DG-SL01-100W	DG-SL01-150W	DG-SL01-200W
Moc	10W	50W	100W	150W	200W
Strumień świetlny	1300lm	6500lm	13000lm	19500lm	26000lm
Efektywność	130lm/w				
Wymiary (mm)	166*107*32	310*220*50	390*295*60	430*330*60	470*360*60
CRI	>Ra70, >Ra80				
Temp. barwowa	3000K, 4000K, 5000K, 5700K, 6500K				
Zasilanie	100-240Vac, 100-277Vac, 50-60Hz, PF≥0.95				
Stopień ochrony	IP65				
Zasilacz	Meanwell, Sosen, Philips				
Temperatura pracy	-30°C to +50°C				
Żywotność	>50,000Hrs				

## Optyka



## Wymiary

	10W	20W	30W	50W	80W	100W	150W	200W
L (mm)	166	216	226	310	354	390	430	470
W (mm)	107	152	167	220	245	295	330	360
H (mm)	32	40	40	50	55	60	60	60

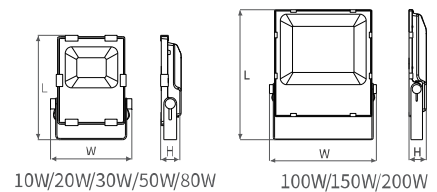

## Opcje sterowania

- Dali
- 1-10V
- Czujnik ruchu
- DMX